
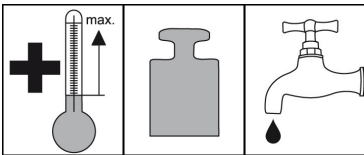


OKS 3520

Extreme-Temperature Oil, light-coloured, synthetic

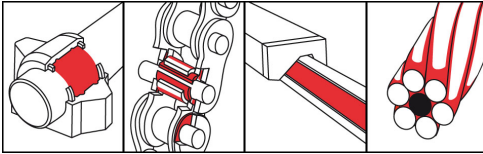

Description

OKS 3520 is a fully synthetic extreme-temperature oil with optimum wear protection also under influence of humidity.

Applications

- Lubrication of chains, joints, clamping and drying frames or slideways at temperatures up to 280°C
- For conveying systems in painting, stoving, drying and cooling bed installations

Branches

- Rail vehicle technology
- Rubber and plastic processing
- Municipal services
- Glass and foundry industry
- Chemical industry
- Iron and steel industry
- Plant and machine (tool) engineering
- Shipbuilding and marine technology
- Paper and packaging industry
- Logistics

Advantages and benefits

- Reduction of the friction coefficients and increase in the wear protection through additives suitable for high temperatures
- Long period of use through high oxidation stability
- Clean chains without deposits (no cracking residues)
- Extended relubrication intervals through low evaporation losses

Application tips

For optimum effect, clean the surfaces. Best way is to clean mechanically first and then with OKS 2610/OKS 2611 universal cleaner. Apply OKS 3520 with a brush, drip oiler or by immersion or using a suitable automatic lubrication system to locations to be lubricated. Allow excess to drip off and wait for lubricant to penetrate before resuming operation. Observe the machine manufacturer's instructions. Assess the lubrication frequency and quantity on basis of service conditions, avoid excessive lubrication. Only mix with suitable lubricants.

Packaging

- 5 l Canister
- 25 l Canister
- 200 l Drum



OKS 3520

Extreme-Temperature Oil, light-coloured, synthetic

Technical Data

	Standard	Conditions	Unit	Value
Main components				
base oil				ester
Application related technical data				
colour				yellowish
density (at 20°C)	DIN EN ISO 3838		g/cm ³	0.97
flashing point	DIN ISO 2592		°C	288
lower operating temperature			°C	-10
marking	DIN 51 502			CLP E 150
upper operating temperature			°C	280
viscosity at (40°C)	DIN 53 019-1		mm ² /s	150

OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47
 82216 Maisach
 Phone: +49 (0) 8142 3051 - 500
 info@oks-germany.com
 www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark

Safety data sheet for industrial and commercial users is available for downloading under www.oks-germany.com.

Our Customer and Technical service will be pleased to help should you have any further questions.