




## OKS 110 - Product Information

### Fields of Application:

For sliding properties improvement of machine parts, apparatuses and precision machinery, especially for microfinished surfaces. For incorporation in plastics, sealings, packages, sintered metals and improvement of sliding properties. For longterm or possibly lifetime-lubrication.

### OKS 110 MoS<sub>2</sub> Powder, Microsize

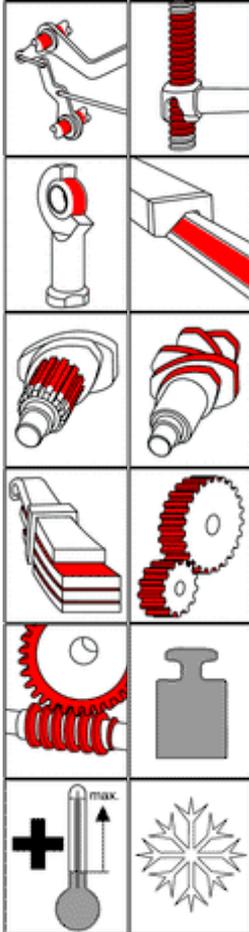

### Advantages and Benefits:

Reduces friction and wear in a wide temperature range. High effectiveness due to high affinity of MoS<sub>2</sub> to metals. Low friction at highest load capacities. Low consumption based on forming of extreme thin sliding films. Not electrically conducting and not magnetic. Chemically stable except against halogenated gases, concentrated sulfuric- and nitric acid.

### Application:

For best adhesion, clean sliding surfaces. Best way is to clean mechanically first and then with OKS 2610 or OKS 2611 universal cleaner. Apply on small parts in series production by tumbling, under addition of small amounts powder and tumbling parts, until a complete MoS<sub>2</sub> film is formed. Brush the powder onto bigger surfaces. Addition of approx. 2 - 3% for self-lubricating material before forming. For further questions please contact our Technical Department.

### Zusatzinformationen:

Liefergebinde (Artikelnummer):

- 1 kg Tin (00110034)
- 5 kg Hobbock (00110050)
- 25 kg Hobbock (00110062)

Version:  
E-04.1/13

The data in this brochure are the result of extensive testing and experience and meet the latest stage of engineering. Due to the diversity of application possibilities and technical realities they can only be recommendations and are not arbitrarily transferable; thus no obligations, liability or warranty claims can be derived herefrom. We accept liability for the fitness of our products for particular purposes and accept such liability in writing in the individual case. In any event any justified warranty claims shall be limited to the delivery of replacement goods which are free from defect or, in the event that such subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular but without limitation any liability for consequent damage, shall be excluded. Prior to use own testing must be done to prove suitability. The data are subject to change for the sake of technical progress. ® = Registered Trademark



# OKS 110 MoS<sub>2</sub> Powder, Microsize

## Technical Data

|                             | Norm         | Conditions                 | Unit              | Value                  |
|-----------------------------|--------------|----------------------------|-------------------|------------------------|
| <b>Solid Lubricants</b>     |              |                            |                   |                        |
| Type                        |              |                            |                   | MoS <sub>2</sub>       |
| Particle size               | ISO 13320-1  | d 50<br>max. d 99          | µm                | 2,5 - 5,0<br>max. 15,0 |
| Entire share                |              | MoS <sub>2</sub> - content | mass-%            | > 98,5                 |
| <b>Application Data</b>     |              |                            |                   |                        |
| Density                     |              |                            | g/cm <sup>3</sup> | approx. 4,8            |
| Colour                      |              |                            |                   | grey-black             |
| <b>Service Temperatures</b> |              |                            |                   |                        |
| Minimum service temperature |              |                            | °C                | -185                   |
| Maximum service temperature |              | in normal atmosphere       | °C                | 450                    |
| Maximum service temperature |              | in vakuum                  | °C                | 1100                   |
| Maximum service temperature |              | in inert gas               | °C                | 1300                   |
| <b>Miscellaneous</b>        |              |                            |                   |                        |
| Electrical Conductivity     | DIN 51 412-1 |                            |                   | non-conductive         |

The data in this brochure are the result of extensive testing and experience and meet the latest stage of engineering. Due to the diversity of application possibilities and technical realities they can only be recommendations and are not arbitrarily transferable; thus no obligations, liability or warranty claims can be derived herefrom. We accept liability for the fitness of our products for particular purposes and accept such liability in writing in the individual case. In any event any justified warranty claims shall be limited to the delivery of replacement goods which are free from defect or, in the event that such subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular but without limitation any liability for consequent damage, shall be excluded. Prior to use own testing must be done to prove suitability. The data are subject to change for the sake of technical progress. © = Registered Trademark