


## OKS 1110 Multi-Silicone Grease

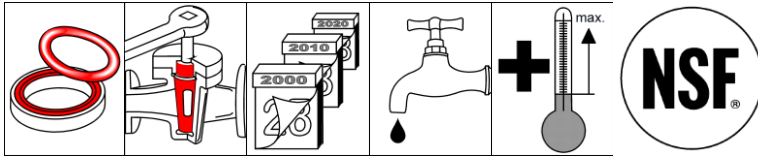

### Description

Highly adhesive transparent silicone grease for fittings, seals and plastic parts.

### Applications

- Sealant and lubricant for cold and hot-water valves in vehicle heating systems or cooling circuits and for ground seals on glass taps and desiccators
- Lubrication of O-rings and rubber seals for assembly and during operation
- Lubrication of plastic parts

### Main fields of application

- Sealing technology
- Plumbing and heating sector
- Food processing technology

### Advantages and benefits

- NSF H1-registered
- Tasteless and odourless
- Highly effective due to excellent adhesion on all materials
- Neutral behaviour with regard to plastics and elastomers
- Completely EPDM-compatible
- High long-term stability without drying out, hardening or bleeding
- Resistant to cold and hot water, as well as acetone, ethanol, ethylene glycol, glycerine and methanol

### Application tips

Clean the lubricating points well for optimal effect. Apply the grease evenly and thinly to the functional surfaces with a brush, spatula, etc. Avoid excesses. In as far as available, observe the machine manufacturer's instructions. Assess the lubrication frequency and quantity on basis of service conditions. Only mix with suitable lubricants. Caution: Plastic based on silicone, such as silicone rubber can be attacked by silicone grease. Silicone grease may not be used at sliding points under pure oxygen influence.

Our customer advice service will be pleased to help should you have any further questions.



# PRODUCT INFORMATION

## OKS 1110 Multi-Silicone Grease

### Technical Data

	Standard	Conditions	Unit	Value
Marking	DIN 51 502	DIN 51 825		MSI3S-40
<b>Base oil</b>				
Type				Polydimethylsiloxane
Viscosity	DIN 51 562-1	40°C 100°C	mm <sup>2</sup> /s mm <sup>2</sup> /s	9,500 3,800
Evaporation loss	DIN 58 397-1	30h / 200°C	Percent in weight	< 2.5
<b>Thickener</b>				
Type				Inorganic
Consistency	DIN 51 818	DIN ISO 2137	NLGI grade	3
Unworked penetration	DIN ISO 2137		0.1 mm	180 - 210
Flow pressure	DIN 51 805	-40°C 20°C	mbar mbar	<100 50
Drop point	DIN ISO 2176		°C	without
Oil separation	DIN 51 817	18 h / 40 °C 168 h / 40°C	Percent in weight Percent in weight	0.86 3.46
Resistance to oxidation	DIN 51 808	100 h / 99°C	bar	< 0.3
<b>Application-specific data</b>				
Density	DIN EN ISO 3838	20°C	g/cm <sup>3</sup>	1.0
Colour				transparent
<b>Operating temperatures</b>				
Lower operating temperature			°C	-40
Upper operating temperature			°C	200
<b>Corrosion protection tests</b>				
SKF-EMCOR	DIN 51 802		Corr. degree 0 - 5	3 and 4
Water resistance	DIN 51 807-1	90°C	Degree 0 - 3	0
<b>Approvals/Specifications</b>				
Food processing technology				NSF H1 Reg. No. 124381
UBA guideline				Test certificate KA 432
DVGW		DIN EN 377		Mark of conformity NG 5162BL0482
Beer foam compatibility				Approval of the BPV Weihenstephan

### Packaging

- 10 g tube
- 100 g tube
- 400 ml cartridge
- 500 g tin
- 5 kg hobbock
- 25 kg hobbock
- 180 kg drum

### OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47  
82216 Maisach, Germany

Phone: +49 (0) 8142 3051 - 523 and 556

Fax: +49 (0) 8142 3051 - 923 and 956

info@oks-germany.com

www.oks-germany.com

Ein Unternehmen der  
Freudenberg Gruppe 

The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark

**Safety data sheet** for industrial and commercial users is available for downloading under [www.oks-germany.com](http://www.oks-germany.com).