




OKS 1510 - Product Information

OKS 1510 Release Agent, Silicone free

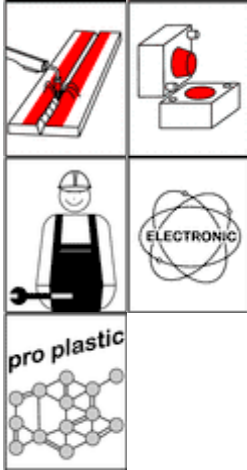

Fields of Application:

Mould parting agent for entire range of plastics processing if an adhesion-dependent further processing requiring silicone-free parting agent is carried out. Welding parting agent for arc welding and inert-gas arc welding. As nozzle spray for extended service life of welding nozzle and keeping nozzle opening clear on automatic welding units. As workpiece protection against baking and burning on of weld spatters.

Advantages and Benefits:

Silicone free release agent with high effective substances from renewable primary products. Prevents from burning in of spatters at welding nozzles, on workpieces and robots and increases the lifetime of the welding torch. No creation of pores. Enables the fast change and cleaning of the welding nozzle. Easily washable with OKS 2650. Additional painting, metallising and printing after prior degreasing without any difficulties possible.

Application:

For optimal effect clean workpiece and aereas to protect from any possible residues. Apply an even film on aereas to be protected. Take care for sufficient ventilation. For further processes with the workpieces, like e.g. galvanizing, hot galvanizing, varnishing, a.s.o., a prior test is recommended. For further questions please contact our Technical Department.

Additional Information:

Packaging (Article number):

- 5 l Canister (01510050)
- 25 l Canister (01510062)
- 200 l Drum (01510072)

Version:

E-07.1/13

The data in this brochure are the result of extensive testing and experience and meet the latest stage of engineering. Due to the diversity of application possibilities and technical realities they can only be recommendations and are not arbitrarily transferable; thus no obligations, liability or warranty claims can be derived herefrom. We accept liability for the fitness of our products for particular purposes and accept such liability in writing in the individual case. In any event any justified warranty claims shall be limited to the delivery of replacement goods which are free from defect or, in the event that such subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular but without limitation any liability for consequent damage, shall be excluded. Prior to use own testing must be done to prove suitability. The data are subject to change for the sake of technical progress. ® = Registered Trademark



OKS 1510

Release Agent, Silicone free

Technical Data

	Norm	Conditions	Unit	Value
Base Oil				
Type				vegetable oil
Additives				
Type				solvent
Application Data				
Density	DIN EN ISO 3838	+20°C	g/ml	1,0

The data in this brochure are the result of extensive testing and experience and meet the latest stage of engineering. Due to the diversity of application possibilities and technical realities they can only be recommendations and are not arbitrarily transferable; thus no obligations, liability or warranty claims can be derived herefrom. We accept liability for the fitness of our products for particular purposes and accept such liability in writing in the individual case. In any event any justified warranty claims shall be limited to the delivery of replacement goods which are free from defect or, in the event that such subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular but without limitation any liability for consequent damage, shall be excluded. Prior to use own testing must be done to prove suitability. The data are subject to change for the sake of technical progress. ® = Registered Trademark