


OKS 340 / OKS 341 Chain Protector, strongly adhesive

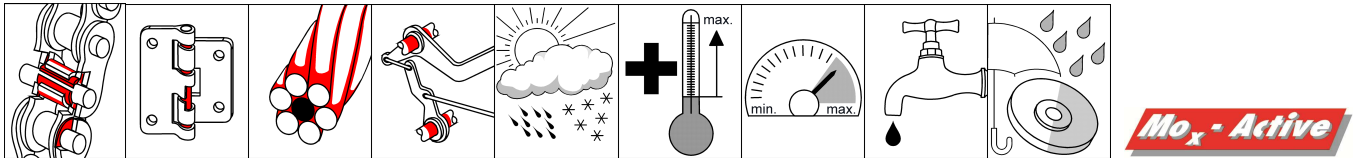

Description

Synthetic lubricant for indoor and outdoor machine elements subjected to high pressure or corrosive influences.

Applications

- Lubrication of fast-running drive chains of all designs for open or semi-open operation without a permanent re-lubricating device, such as motorcycle and bicycle chains.
- Lubrication of hoisting chains such as multirow roller chains or stacker truck chains, as well as single or multiple flat-link articulated chains

Advantages and benefits

- Highly effective due to outstanding creep and gap penetration properties
- Extreme adhesive strength
- Extreme wear protection through Mo_x-Active additive
- Very high resistance to cold and hot water as well as to saline solutions
- Excellent corrosion protection
- O-ring neutral
- Also available as spray version OKS 341

Main fields of application

- Service
- Maintenance

Application Tips

For best adhesion, clean the surfaces mechanically first and then with OKS 2610 / OKS 2611 universal cleaner. Apply OKS 340 with a brush, drip oiler, by immersion or using a suitable automatic lubrication system. Spray on evenly OKS 341 spray. Allow excess to drip off and wait for lubricant to penetrate before resuming operation. In as far as available, observe the machine manufacturer's instructions. Assess the lubrication frequencies and quantities on basis of service conditions, avoid excesses. Caution: Only mix with suitable lubricants.

Our customer advice service will be pleased to help should you have any further questions.

PRODUCT INFORMATION

OKS 340 / OKS 341 Chain Protector, strongly adhesive

Technical Data

| | Standard | Conditions | Unit | Value |
|----------------------------------|-----------------|---------------------------|--------------------|--|
| Marking | DIN 51 502 | | | CLP X 460 |
| Base oil | | | | |
| Type | | | | Polyisobutylene |
| Viscosity | DIN 51 562-1 | 40°C | mm ² /s | 470 |
| Viscosity class | DIN 51 519 | DIN 51 562-1, 40°C | ISO VG class | 460 |
| Flashing point | DIN ISO 2592 | > 79 | °C | > 200 |
| Additives | | | | |
| Additives | | | | Mo _x -Active, adhesion improver |
| Application-specific data | | | | |
| Density | DIN EN ISO 3838 | 20°C | g/ml | 0.9 |
| Colour | | | | brownish-transparent |
| Operating temperatures | | | | |
| Lower operating temperature | | | °C | -30 |
| Upper operating temperature | | | °C | 180 |
| Wear protection tests | | | | |
| Four-ball test rig welding load | DIN 51 350-4 | | N | 2,600 |
| Four-ball test rig wear | DIN 51 350-5 | 1,420 1/min / 1 h / 800 N | mm | 0.4 |

Packaging

- 1 l tin
- 5 l canister
- 25 l canister
- 200 l drum
- 500 ml spray (OKS 341)

OKS Spezialschmierstoffe GmbH
Ganghoferstraße 47
82216 Maisach, Germany

Phone: +49 (0) 8142 3051 - 523 and 556
Fax: +49 (0) 8142 3051 - 923 and 956

info@oks-germany.com
www.oks-germany.com

Ein Unternehmen der
Freudenberg Gruppe



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark

Safety data sheet for industrial and commercial users is available for downloading under www.oks-germany.com.