




OKS 360 – Product Information

OKS 360 High-Performance Corrosion Protection Oil

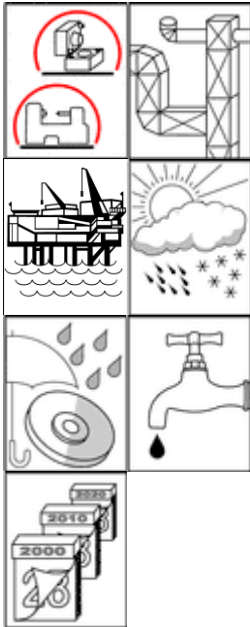

Fields of Application:

Corrosion protection for ferrous and non-ferrous metals in all handicraft and industrial sectors, especially in corrosive atmospheres, in coastal regions or offshore. Optimum corrosion protection for moving parts, e.g. valve spindles, piston rods, wire cables and drag cables, drive and conveyor chains, hinges and guides. Preservation under high corrosive loading, e.g. industrial atmospheres, outdoor weathering under roofs of semi-finished products, finished products, parked vehicles, agricultural and construction machines, in building constructions and civil engineering etc. up to 2 years. Shipping protection of packed and unpacked machines and machine parts, apparatuses and equipment goods under extreme climatic conditions.

Advantages and Benefits:

Excellent suited as long-term corrosion protection of all bare ferrous and non-ferrous metals under highly corrosive conditions. Highly effective due to multifunctional VCI corrosion inhibitors. Broad range of uses for optimum corrosion protection with simultaneous lubricating effect. After drying it forms a transparent, oily protective film that will not run off and also adheres well to vertical surfaces.

Application:

For best results clean the surface, first mechanically and then with OKS 2610/OKS 2611 Universal Cleaner. Apply a thin layer onto the dry and clean areas with a brush, drip feed lubrication by dipping or automated spraying systems. Avoid excess application. Compatible to most oil based lubricants, it is not necessary to remove the film before use. Take care of manufacturers advices. Mix with appropriate lubricants only. For additional questions please contact our Technical Department.

Additional Information:

Packaging (Article number):

- 5 l Canister (00360050)
- 25 l Canister (00360062)

Version
E-03.1/13

The data in this brochure are the result of extensive testing and experience and meet the latest stage of engineering. Due to the diversity of application possibilities and technical realities they can only be recommendations and are not arbitrarily transferable; thus no obligations, liability or warranty claims can be derived herefrom. We accept liability for the fitness of our products for particular purposes and accept such liability in writing in the individual case. In any event any justified warranty claims shall be limited to the delivery of replacement goods which are free from defect or, in the event that such subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular but without limitation any liability for consequent damage, shall be excluded. Prior to use own testing must be done to prove suitability. The data are subject to change for the sake of technical progress. ® = Registered Trademark



OKS 360 High-Performance Corrosion Protection Oil

Technical Data

	Norm	Conditions	Unit	Value
Base Oil				
Type				Mineral oil
Viscosity	DIN 51 562-1	+40°C	mm ² /s	15
Viscosity class	DIN 51 519	DIN 51 562-1, 40°C	ISO VG- class	15
Additives				
Type				VCI-corrosion protection
Application Data				
Density	DIN EN ISO 3838	+20°C	g/ml	0,88
Colour				light-coloured
Service Temperatures				
Minimum service temperature			°C	-40
Maximum service temperature			°C	80
Corrosion Protection Tests				
Salt spray test	DIN 50 021SS	40 µm	h	340

The data in this brochure are the result of extensive testing and experience and meet the latest stage of engineering. Due to the diversity of application possibilities and technical realities they can only be recommendations and are not arbitrarily transferable; thus no obligations, liability or warranty claims can be derived herefrom. We accept liability for the fitness of our products for particular purposes and accept such liability in writing in the individual case. In any event any justified warranty claims shall be limited to the delivery of replacement goods which are free from defect or, in the event that such subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular but without limitation any liability for consequent damage, shall be excluded. Prior to use own testing must be done to prove suitability. The data are subject to change for the sake of technical progress. © = Registered Trademark