


## OKS 370 / OKS 371 Universal Oil for Food Processing Technology

---

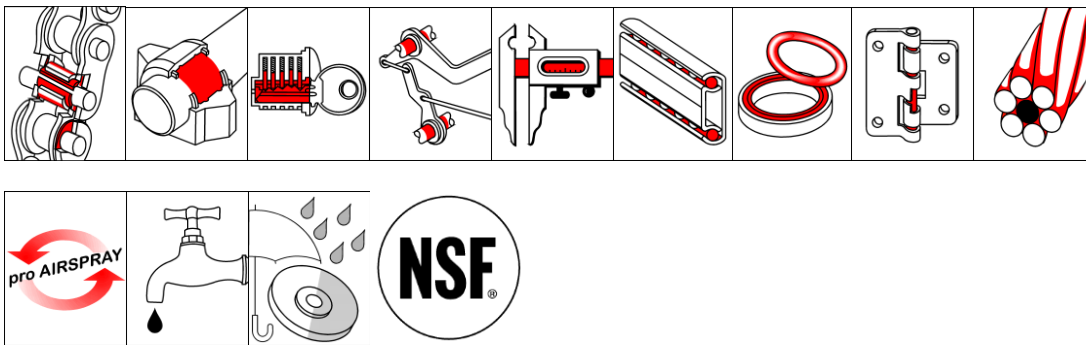

### Description

Physiologically harmless colourless universal oil for food processing technology.

### Applications

- Lubrication of valve seals, collars, O-rings, drives, piston rods and guides
- Lubrication of slides, slat-band and roller chains
- Lubrication of cutting knives as well as of needles and lifters of knitting machines
- Dismantling of rusted-in parts and removal of oil and greasy soiling

### Advantages and benefits

- NSF H1-registered
- Highly effective due to good creep properties
- Broad range of uses
- Displaces water
- OKS 370 is suitable for use with the OKS Airspray system
- Also available as spray version OKS 371

### Main fields of application

- Food processing, brewery and beverage industry
- Paper and cardboard industry

### Application tips

Clean the surfaces for optimal effect. Apply OKS 370 with a brush, drip oiler or by immersion or using a suitable automatic lubrication system locations to be lubricated. Spray on evenly OKS 371 spray. Avoid excesses. In as far as available, observe the machine manufacturer's instructions. Assess the lubrication frequency and quantity on the basis of the service conditions. Caution: Only mix with suitable lubricants.

Our customer advice service will be pleased to help should you have any further questions.



# PRODUCT INFORMATION

## OKS 370 / OKS 371 Universal Oil for Food Processing Technology

### Technical Data

	Standard	Conditions	Unit	Value
Marking				CL 15
<b>Base oil</b>				
Type				White oil
Viscosity	DIN 51 562-1	40°C	mm <sup>2</sup> /s	14
Viscosity class	DIN 51 519	DIN 51 562-1, 40°C	ISO VG class	15
Pour point	DIN ISO 3016	3°C step	°C	-18
Flashing point	DIN ISO 2592	> 79	°C	200
<b>Application-specific data</b>				
Density	DIN EN ISO 3838	20°C	g/ml	0.87
Colour				colourless
<b>Operating temperatures</b>				
Lower operating temperature			°C	-10
Upper operating temperature			°C	180
<b>Approvals/Specifications</b>				
Food processing technology		OKS 370		NSF H1 Reg. No. 124382
Food processing technology		OKS 371		NSF H1 Reg. No. 124384

### Packaging

- 5 l canister
- 25 l canister
- 200 l drum
- 400 ml spray (OKS 371)

### OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47  
82216 Maisach, Germany

Phone: +49 (0) 8142 3051 - 523 and 556  
Fax: +49 (0) 8142 3051 - 923 and 956

info@oks-germany.com  
www.oks-germany.com

Ein Unternehmen der  
Freudenberg Gruppe 

The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark

**Safety data sheet** for industrial and commercial users is available for downloading under [www.oks-germany.com](http://www.oks-germany.com).