


OKS 600 / OKS 601 Multi Oil

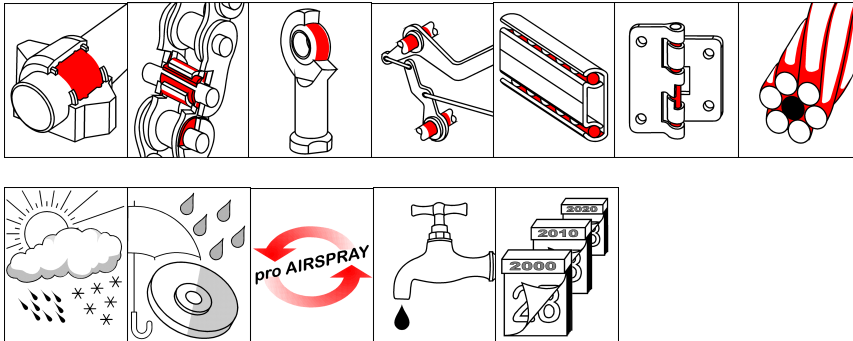

Description

Low-viscosity light-coloured multipurpose oil for a wide range of applications in industrial maintenance and in the workshop field.

Applications

- For cleaning and care of metal surfaces
- Dismantling rusted-in parts
- Protects electrical contacts
- Temporary corrosion protection for bare metal surfaces
- Elimination of squeaking noises
- Lubrication of friction points at moving machine parts

Main fields of application

- Workshop field
- Maintenance

Advantages and benefits

- Broad range of uses (6-fold action)
- Highly effective due to very good creep properties
- Also infiltrates strong oil and greasy soiling
- Good lubricating properties thanks to high oil percentage
- Displaces moisture
- OKS 600 is suitable for use with the OKS Airspray system
- Also available as spray version OKS 601

Application tips

For optimum effectiveness, first clean contamination away from surface mechanically. Apply OKS 600 generously with a brush, drip oiler, oil can or by immersion. Spray OKS 601 on. Allow to work in for time corresponding to depth of penetration required. If necessary, repeat the application several times. Apply in sufficient quantities for lubrication. Caution: Only mix with suitable lubricants.

Our customer advice service will be pleased to help should you have any further questions.

PRODUCT INFORMATION

OKS 600 / OKS 601 Multi Oil

Technical Data

	Standard	Conditions	Unit	Value
Marking	Analogue to DIN 51 502			CL 3
Base oil				
Type				Mineral oil
Viscosity	DIN 51 562-1	40°C		approx. 3
Flashing point	DIN EN 22 719		°C	>64
Application-specific data				
Density	DIN EN ISO 3838	20°C	g/ml	0.81
Colour				brownish transparent
Operating temperatures				
Lower operating temperature			°C	-30
Upper operating temperature			°C	60
Corrosion protection tests				
Salt spray test	DIN EN ISO 9227		h	>50
Wear protection tests				
Coefficient of friction SRV	DIN 51834-2	Ball / disk	μ	0.09
Wear SRV	DIN 51834-2	Ball / disk	mm³	<0.003

Packaging

- 5 l canister
- 25 l canister
- 200 l drum
- 400 ml spray (OKS 601)

OKS Spezialschmierstoffe GmbH
Ganghoferstraße 47
82216 Maisach, Germany

Phone: +49 (0) 8142 3051 - 523 and 556
Fax: +49 (0) 8142 3051 - 923 and 956

info@oks-germany.com
www.oks-germany.com

Ein Unternehmen der
Freudenberg Gruppe



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress.

® = Registered trademark

Safety data sheet for industrial and commercial users is available for downloading under www.oks-germany.com.