


## OKS 670 / OKS 671

### High-Performance Lube Oil with white Solid Lubricants

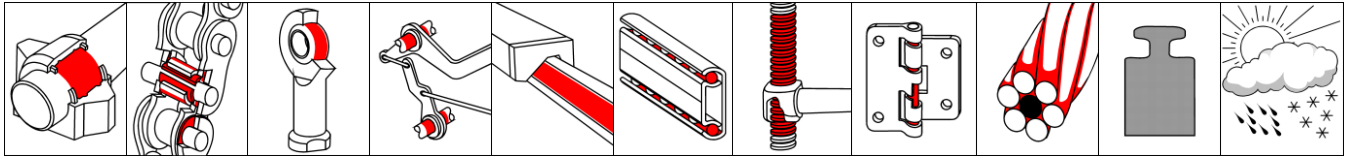

#### Description

High-performance lube oil with good penetration properties, for long-term lubrication of machine elements subjected to high pressures, dust or moisture.

#### Applications

- Lubrication wherever good penetration capacity is the only possibility for relubrication, for example at joints, hinges, linkages, levers and guides
- Lubrication of machine elements subjected to moisture, for example at conveying systems, packaging machines, automatic filling machines, etc.
- Chains in a dusty environment

#### Advantages and benefits

- Light-coloured
- High lubrication effect due to optimum product formula
- Good creep properties, thus easy penetration even in narrow, hard-to-reach lubricating points
- Good lubricating and pressure absorption capacity
- Excellent corrosion protection
- Good wear protection, also in comparison to higher-viscosity oils without solid lubricants
- Broad range of uses in all maintenance sectors
- Also available as spray version OKS 671

#### Main fields of application

- Packaging industry
- Conveyor systems
- Servicing
- Workshop field

#### Application tips

For highest effectiveness, clean the lubrication point. Best way is to clean mechanically first and then with OKS 2610 / OKS 2611 universal cleaner. Stir or shake well before use. Apply sufficient OKS 670 with a brush, drip oiler, oil can or by immersion. Spray OKS 671 on evenly. Remove any excess. Only mix with suitable lubricants.

Our customer advice service will be pleased to help should you have any further questions.

## OKS 670 / OKS 671

### High-Performance Lube Oil with white Solid Lubricants

#### Technical data

	Standard	Conditions	Unit	Value
Marking	Analogue to DIN 51 502			CLF 15
<b>Base oil</b>				
Type				Mineral oil
<b>Additives</b>				
Solid lubricant, type				White solid lubricants
<b>Application-specific data</b>				
Viscosity	DIN 51 562-1	40°C (with solvent)	mm <sup>2</sup> /s	18
Flashing point	DIN ISO 2592		°C	64
Density	DIN EN ISO 3838	20°C (with solvent)	g/ml	0.82
Colour				Beige
<b>Operating temperatures</b>				
Lower operating temperature			°C	-30
Upper operating temperature			°C	60
<b>Wear protection tests</b>				
Coefficient of friction SRV	Analogue to DIN 51 834-2	Ball / disk	μ	0.08
Coefficient of friction SRV	Analogue to DIN 51 834-2	Ball / disk	mm <sup>3</sup>	0.002
<b>Corrosion protection tests</b>				
Salt spray test	DIN EN ISO 9227		h	>150

#### Packaging

- 5 l canister
- 25 l canister
- 200 l drum
- 400 ml spray (OKS 671)

**OKS Spezialschmierstoffe GmbH**  
 Ganghoferstraße 47  
 82216 Maisach, Germany

Phone: +49 (0) 8142 3051 - 523 and 556  
 Fax: +49 (0) 8142 3051 - 923 and 956

info@oks-germany.com  
 www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress.  
 ® = Registered trademark

**Safety data sheet** for industrial and commercial users is available for downloading under [www.oks-germany.com](http://www.oks-germany.com).